


EROSION CONTROL LEGEND

— — 600— — —	EXISTING MAJOR CONTOUR
— — 601— — —	EXISTING MINOR CONTOUR
	PROPOSED MAJOR CONTOUR
602	PROPOSED MINOR CONTOUR
	FLOW ARROW
	EXISTING STORM DRAIN
	EXISTING CURB INLET
	PROPOSED STORM DRAIN
	PROPOSED CURB INLET
W	PROPOSED WATER LINE
	PROPOSED SEWER LINE
SF SF	SILT FENCE

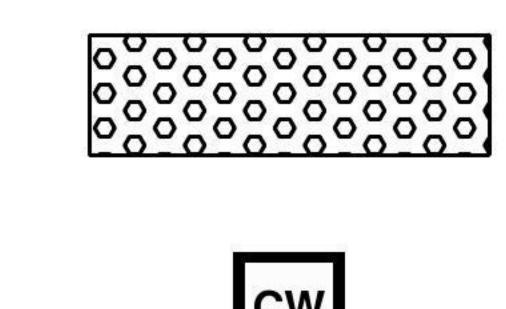

CONCRETE WASHOUT AREA (FIELD LOCATE)

TRASH BIN (FIELD LOCATE)

- 1. EROSION CONTROL MEASURES SHALL FOLLOW THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP). ANY CHANGES TO THE
- CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS AND MAINTAINING COMPLIANCE WITH THE GENERAL PERMIT.
- 3. PRIOR TO COMMENCING ANY CONSTRUCTION, A CONSTRUCTION ENTRANCE AND NECESSARY PERIMETER CONTROLS SHALL BE INSTALLED.
- 4. CONTRACTOR IS RESPONSIBLE FOR INSTALLATION, ROUTINE INSPECTION AND/OR MAINTENANCE OF STORM WATER POLLUTION PREVENTION CONTROL MEASURES.
- 5. ALL STORM WATER POLLUTION PREVENTION CONTROL MEASURES SHALL BE INSTALLED WITHIN THE SITE BOUNDARY OR PUBLIC R.O.W. AS SHOWN ON THE PLANS. SOME OF THESE STRUCTURES MAY BE SHOWN OUTSIDE THE SITE BOUNDARY ON THIS PLAN FOR VISUAL CLARITY.
- 6. CONCRETE WASHOUT PIT AND CONSTRUCTION EQUIPMENT/MATERIAL STORAGE YARD TO BE FIELD LOCATED.
- 7. AS SOON AS PRACTICAL, ALL DISTURBED SOIL THAT WILL NOT BE COVERED BY IMPERVIOUS COVER SHOULD BE STABILIZED BY PER APPLICABLE PROJECT SPECIFICATIONS AND LANDSCAPE PLANS.
- 8. THE EROSION CONTROL DEVICES SHALL REMAIN IN PLACE UNTIL ACCEPTABLE VEGETATION COVERAGE HAS BEEN ACHIEVED IN ACCORDANCE WITH THE GENERAL PERMIT.
- ANY ADDITIONAL EROSION CONTROL MEASURES REQUIRED TO COMPLY WITH THE SWPPP OR TCEQ STORMWATER POLLUTION REGULATIONS SHALL BE IMPLEMENTED BY THE CONTRACTOR, AT HIS EXPENSE.



(S)